

# MULTI SPOT



REGGIANI



**RE8257**  
 .10 WHITE .21 BLACK  
 .28 METALLISED GREY

Recessed downlight, with faceted anodised aluminium reflector, with pre-wired remote electronic control gear



**RE13806**  
 .10 WHITE .21 BLACK  
 .28 METALLISED GREY

Mollablok fast installation system for ceilings 0-35mm. IOS Interchangeable Optic System



**RE13811**  
 .10 WHITE .21 BLACK  
 .28 METALLISED GREY

Mollablok fast installation system for ceilings 0-35mm. Interchangeable optic system

**Recessed fixed downlight, with pre-wired control gear**

**Multi Spot 188 IP66**  
 RECESSED FIXED COMPACT FLUORESCENT IP66 DOWNLIGHT, WITH GASKETTED BEZEL

Mollablok fast installation system for ceilings 0-35mm

**Multi Spot 188 IP66**  
 RECESSED FIXED METAL HALIDE IP66 DOWNLIGHT, WITH GASKETTED BEZEL AND IOS INTERCHANGEABLE REFLECTOR



Recessed downlight, IP66 rated with remote electronic control gear

**Multi Spot 188 IP66**  
 RECESSED FIXED METAL HALIDE IP66 IOS INTERCHANGEABLE REFLECTOR

Recessed downlight, IP66 rated with remote electronic control gear



**BODY** Die cast aluminium, metal black housing  
**REFELECTOR** IOS 99.99% super pure aluminium  
**BEZEL** Die cast aluminium  
**FIXING** Fast fix mollablok ceiling clamps  
**FRONT COVER** Heat Treated clear safety glass

**1x 26W TC-DE Compact Fluorescent**

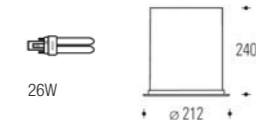



LOR 41%

**1x 35W CDM-T G12 Metal Halide**

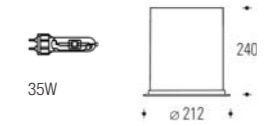

LOR 85%

**1x 70W CDM-T G12 Metal Halide**

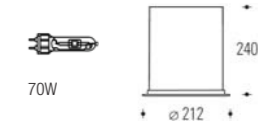

LOR 80%

# MULTI SPOT




**RE13816**  
 .10 WHITE .21 BLACK  
 .28 METALLISED GREY

Mollablok fast installation system for ceilings 0-35mm. IOS Interchangeable Optic System

**Multi Spot 188 IP66**  
 RECESSED FIXED METAL HALIDE IP66  
 DOWNLIGHT, WITH GASKETTED BEZEL  
 AND IOS INTERCHANGEABLE REFLECTOR

Recessed downlight, IP66 rated with remote electronic control gear

1x 150W CDM-T G12 Metal Halide

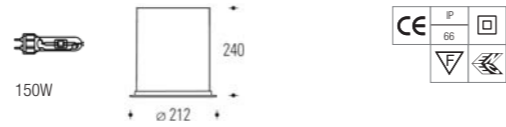

LOR 79%

## Lamp and Reflector Options

**LOW VOLTAGE**  
 QR-CBC 51 (MAX 50W) 10°, 24°, 38°, 60°  
 GY6.35 QT-12 (12V 50W) 94°

**MAINS VOLTAGE**  
 G9 QT-14 (MAX 75W) 94°

**DISCHARGE**  
 G8.5 CDM-TC (35W) 82°, 92°  
 G8.5 CDM-TC (70W) 82°, 94°  
 G12 CDM-T (35W) 48°, 50°, 64°, 76°, 82°, 92°  
 G12 CDM-T (70W) 52°, 66°, 68°, 76°, 82°, 94°  
 G12 CDM-T (150W) 54°, 64°, 68°, 76°

**FLUORESCENT**  
 GX24q-1 (13W) 96°  
 GX24q-2 (18W) 70°, 94°  
 GX24q-2 (2X18W) 98°, 50°, 64°, 76°, 82°, 92°  
 GX24q-3 (26W) 70°, 84°, 86°  
 GX24q-3 (2X26W) 48°, 50°, 64°, 76°, 82°, 92°

## IOS Reflectors

