


NARANCIA



REGGIANI

Wall mounted projector, in 3 body sizes with direct / indirect or direct light distribution, integral control gear, and adjustable optic compartments

BODY Aluminium with separate control gear compartment
REFLECTOR IOS, lamp reflector, or 99.9% anodised aluminium.
FIXING Surface mounted to side sliding wall bracket. Luminaire may be mounted in upward or downward plane
ADJUSTMENT IOS optic, horizontal -25°/0°/25° dependant on model
FRONT GLASS IOS reflector, clear tempered safety glass, or convex safety glass (QR-111)





RE11005
 .10 WHITE .21 BLACK .33 BEIGE
 .28 METALLISED GREY

Narancia 260
 WALL MOUNTED PROJECTOR IP40,
 WITH INDIRECT LIGHT DISTRIBUTION

Rapid installation mechanical/electrical connection

70W CDM-TC G8.5 Metal Halide

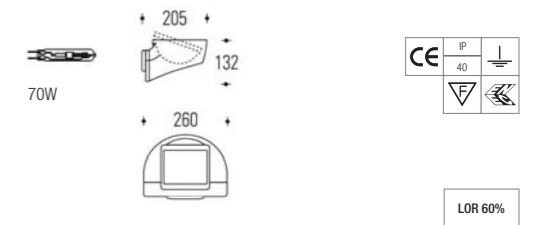


RE11013
 .10 WHITE .21 BLACK .33 BEIGE
 .28 METALLISED GREY

Narancia 260
 WALL MOUNTED PROJECTOR IP40,
 WITH INDIRECT LIGHT DISTRIBUTION

Rapid installation mechanical/electrical connection

1x 70W CDM-TC G8.5 Metal Halide

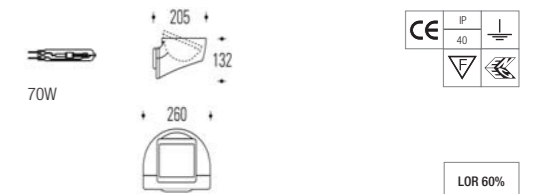


RE14758
 .26 BLACK GRAPHITE .27 WHITE
 GLOSS .28 METALLISED GREY


Narancia 300 Outdoor
 WALL MOUNTED PROJECTOR, IP66
 WITH INDIRECT LIGHT DISTRIBUTION

Rapid installation mechanical/electrical connection IOS interchangeable optic system

1x 70W CDM-TC G8.5 Metal Halide

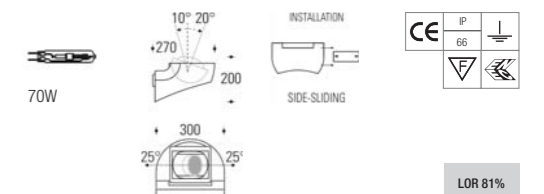

NARANCIA





RE11035
.10 WHITE .21 BLACK
.28 METALLISED GREY

Projector with sealed adjustable lamp compartment, integral electronic control gear

Narancia 400
WALL MOUNTED PROJECTOR IP40,
WITH INDIRECT LIGHT DISTRIBUTION

Rapid installation mechanical/electrical connection

1x 150W CDM-TD RX7s Metal Halide

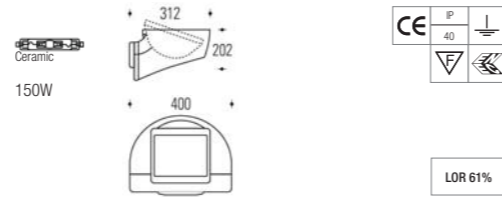


RE11047
.10 WHITE .21 BLACK .33 BEIGE
.28 METALLISED GREY

Projector with sealed adjustable lamp compartment, integral electronic control gear

Narancia 400
WALL MOUNTED PROJECTOR IP40
WITH INDIRECT/DIRECT LIGHT DISTRIBUTION

Rapid installation mechanical/electrical connection

1x 150W DM-TD RX7s Metal Halide

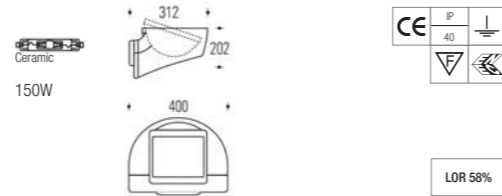



RE11067
.10 WHITE .21 BLACK .33 BEIGE
.28 METALLISED GREY

Projector with sealed adjustable lamp compartment, integral electronic control gear

Narancia 400
WALL MOUNTED PROJECTOR IP40,
WITH INDIRECT LIGHT DISTRIBUTION

Rapid installation mechanical/electrical connection

2x 42W TC-TE Compact Fluorescent

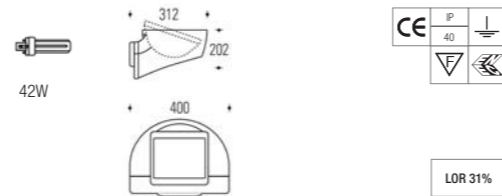


RE11075
.10 WHITE .21 BLACK .33 BEIGE
.28 METALLISED GREY

Projector with sealed adjustable lamp compartment, integral electronic control gear

Narancia 400
WALL MOUNTED PROJECTOR WITH SEALED
ADJUSTABLE LAMP COMPARTMENT,
AND INDIRECT LIGHT DISTRIBUTION

Rapid installation mechanical/electrical connection

2x 42W TC-TE Compact Fluorescent

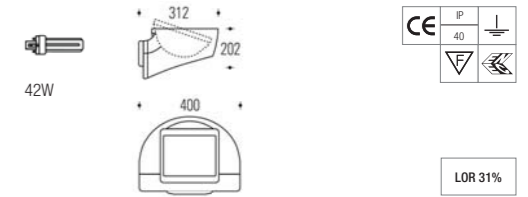

Lamp and Reflector Options:

Low Voltage:
G53 QR-111 (max 65W)
GY 6.35 QT-12 (max 50W)
18°, 24°, 30°, IOS MIRA

Mains Voltage:
R7s QT-DE (max 200W)

Fluorescent:
GX24q-1 TC-TE (13W)
GX24q-2 TC-TE (18W)

Discharge:
G8.5 CDM-TC (20/35W) 14°, 34°, 56°, IOS MIRA
G8.5 CDM-TC (70W) 16°, 34°, 58°, IOS MIRA
G12 CDM-T (35W) 47°
G12 CDM-T (70W) 41°
G12 CDM-T (70W) / R7s QT-DE (100W) 41°/41°

Accessories

IOS MIRA Reflector