


BATTERY TRIMLESS

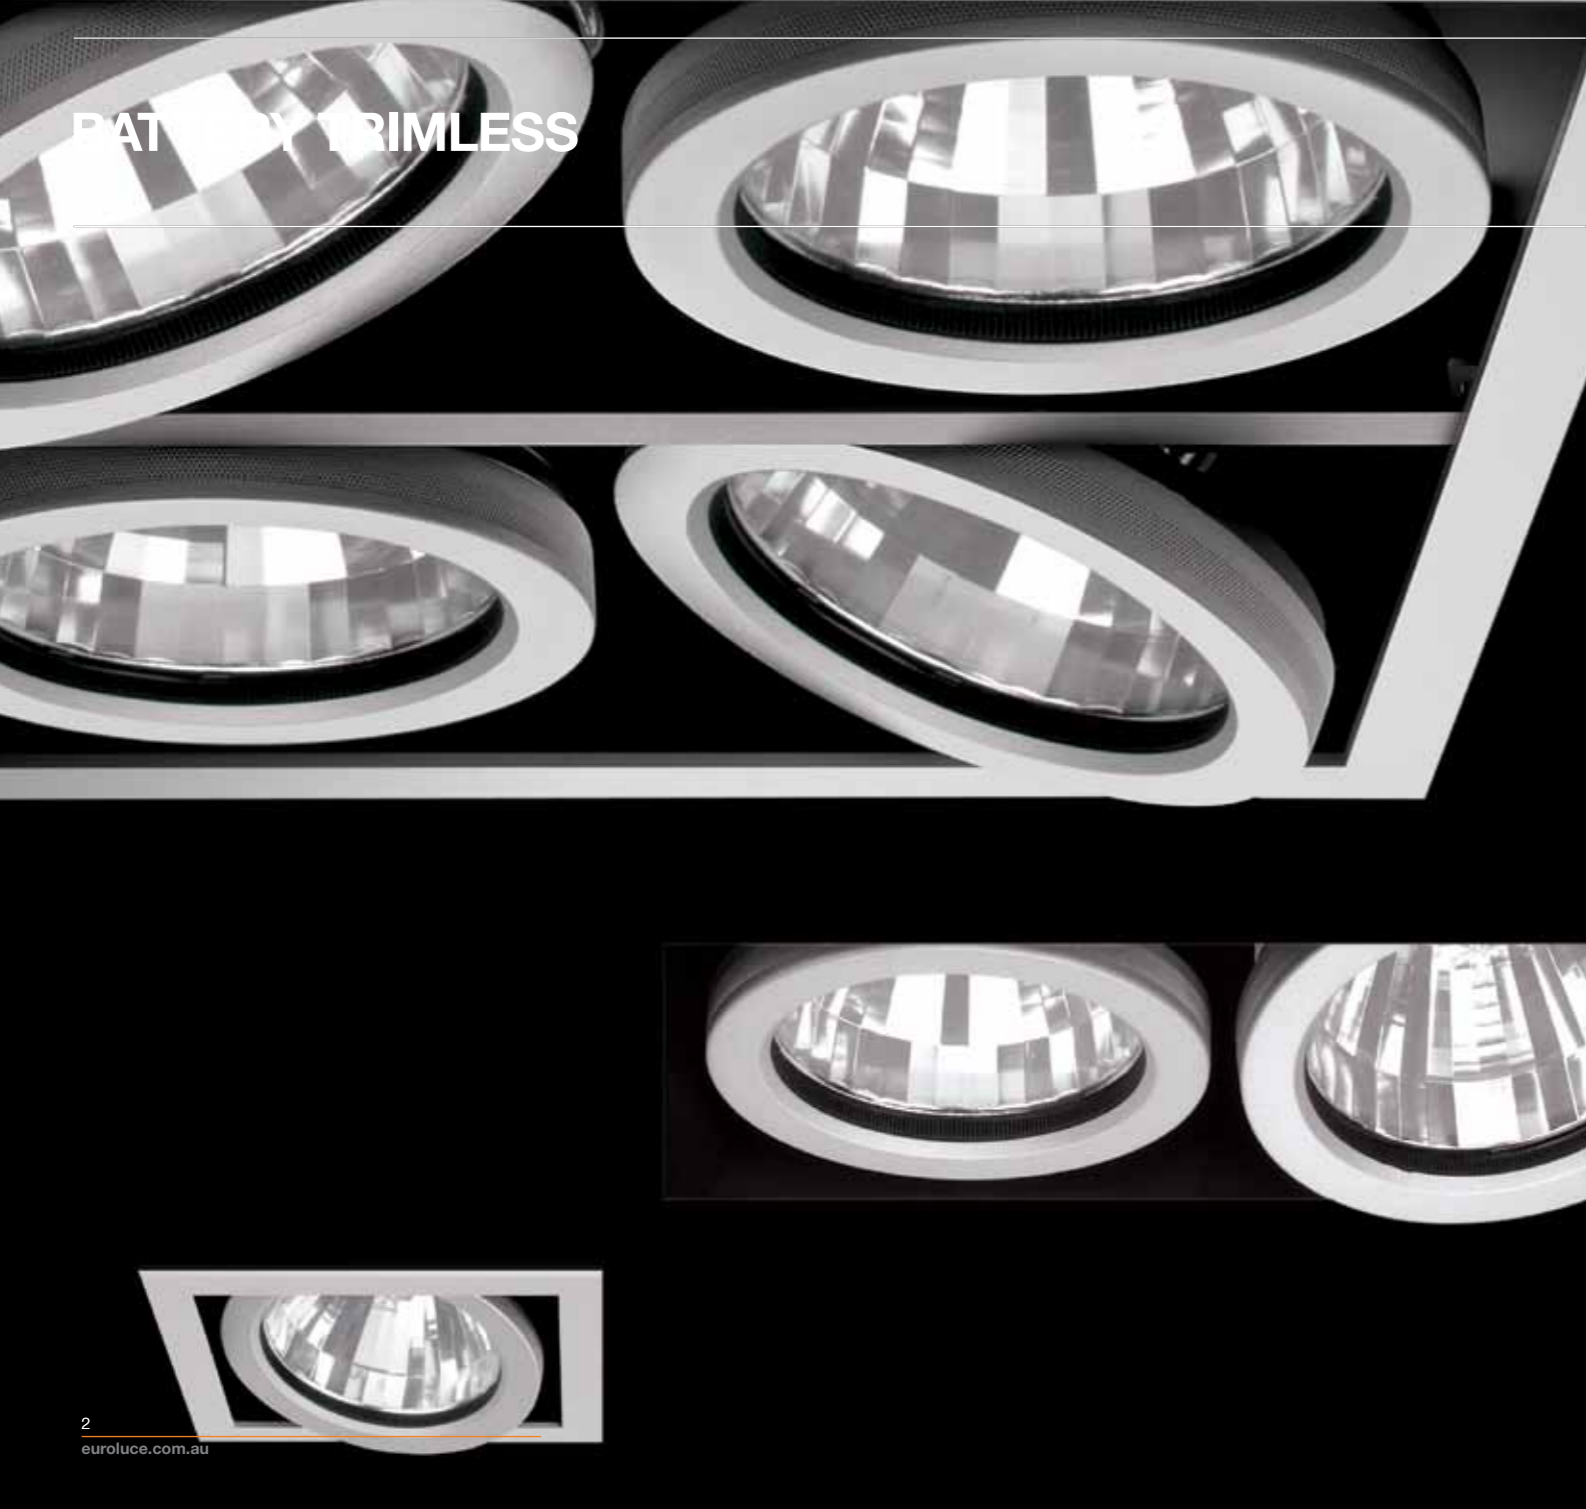

F.A. PORSCHE

Recessed adjustable trimless downlight, with 1, 2, 3 or 4 lamp configuration, with remote control gear. Requires pre-installation kit.

BODY Pressed steel
REFLECTOR Super pure anodised aluminium
BEZEL Die cast aluminium bezel & lamp retaining ring
FIXING Allen key fast fix steel brackets
ADJUSTMENT Horizontal 356°. Vertical 40°
FRONT GLASS 3mm tempered safety glass




AN04.6021.NT
.20 WHITE .08 GREY
.14 BLACK

Recessed mounted, requires remote transformer

Battery Recessed, Single Optic, Trimless
RECESSED ADJUSTABLE LOW VOLTAGE DOWNLIGHT

Requires trimless mounting kit AN08.8080.00

1x Max 50W QR-CBC 12V Low Voltage

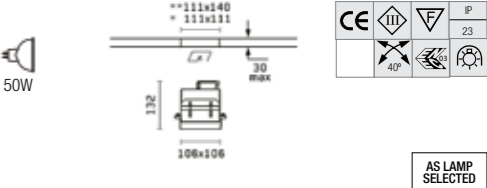

AS LAMP SELECTED




AN04.6022.NT
.20 WHITE .08 GREY
.14 BLACK

Recessed mounted, requires remote transformer

Battery Recessed, 2 Way Optic, Trimless
RECESSED ADJUSTABLE LOW VOLTAGE DOWNLIGHT

Requires trimless mounting kit, AN08.8081.00

2x Max 50W QR-CBC 12V Low Voltage

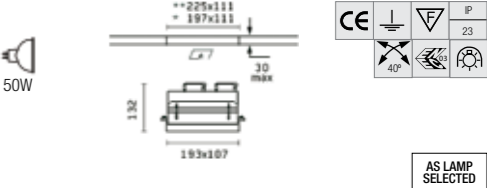

AS LAMP SELECTED




AN04.6023.NT
.20 WHITE .08 GREY
.14 BLACK

Recessed mounted, requires remote transformer

Battery Recessed, 3 Way Optic, Trimless
RECESSED ADJUSTABLE LOW VOLTAGE DOWNLIGHT

Requires trimless mounting kit AN08.8082.00

3x Max 50W QR-CBC 12V Low Voltage

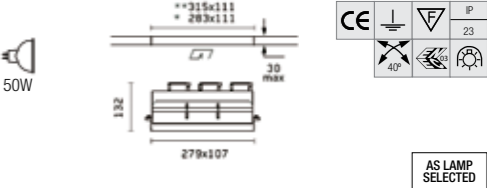

AS LAMP SELECTED

BATTERY TRIMLESS




AN04.6024.NT
.20 WHITE .08 GREY
.14 BLACK

Recessed mounted, requires remote transformer

Battery Recessed, 4 Way Optic, Trimless
RECESSED ADJUSTABLE LOW VOLTAGE DOWNLIGHT

Requires trimless mounting kit AN08.8083.00

4x Max 50W QR-CBC 12V Low Voltage

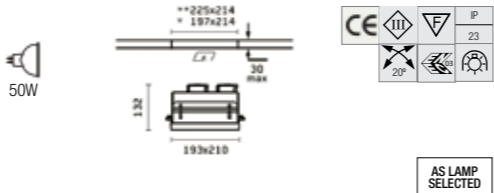


AN04.6125.NT
.20 WHITE .08 GREY
.14 BLACK

Recessed mounted, requires remote control gear

Battery Recessed, Single Optic, Trimless
RECESSED ADJUSTABLE METAL HALIDE DOWNLIGHT

Requires trimless mounting kit AN08.8084.00

1x 70W CDM-TC G8.5

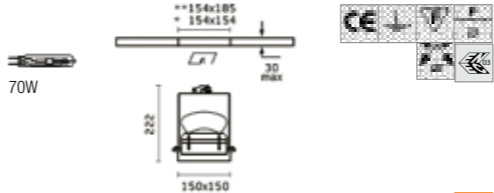

65%




AN04.6127.NT
.20 WHITE .08 GREY
.14 BLACK

Recess mounted, requires remote control gear

Battery Recessed, 2 Way Optic, Trimless
RECESSED ADJUSTABLE METAL HALIDE DOWNLIGHT

Requires trimless mounting kit AN08.8085.00

2x 70W CDM-TC G8.5

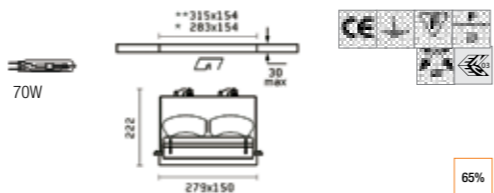

65%




AN04.6135.NT
.20 WHITE .08 GREY
.14 BLACK

Recess mounted, requires remote control gear

Battery Recessed, 3 Way Optic, Trimless
RECESSED ADJUSTABLE METAL HALIDE DOWNLIGHT

Requires trimless mounting kit AN08.8086.00

3x 70W CDM-TC G8.5

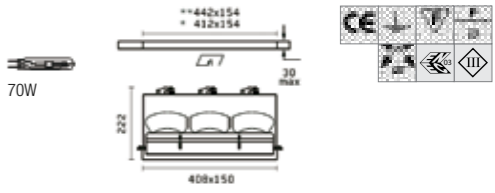

65%




AN04.6139.NT
.20 WHITE .08 GREY
.14 BLACK

Recess mounted, requires remote control gear

Battery Recessed, 4 Way Optic, Trimless
RECESSED ADJUSTABLE METAL HALIDE DOWNLIGHT

Requires trimless mounting kit AN08.8087.00

4x 70W CDM-TC G8.5

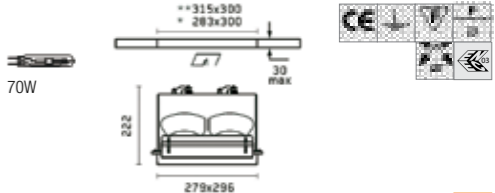

65%

BATTERY TRIMLESS

Lamp and Reflector Options

LOW VOLTAGE

GX5.3 QR-CBC 51 (max 50w) 10°, 24°, 38°, 60°
 BA15d QR-70 (max 50w) 8°, 24°
 GY6.35 QT-12 (max 100w) 6°, 9°, 26°
 G53 QR-111 (max 100w) 4°, 8°, 24°, 45°

MAINS VOLTAGE

E27 PAR30S (MAX 75W) 10°, 30°

DISCHARGE

GX8.5 CDM-TC (35w/70w) 14°, 36°
 G12 CDM-T (35w/70w) 12°, 25°
 E27 CDM-R PAR30 (35w/70w) 10°, 30°

Accessories

Anti-Glare Grid
 Elliptical Light Distribution Lens
 Flood Lens
 Screening Cylinder

Mounting Frames

08.8080.00



08.8081.00



08.8082.00



08.8083.00



08.8084.00



08.8085.00



08.8086.00



08.8087.00



Filters

— BLUE
 — SKY BLUE
 — AMBER
 — RED
 — UV
 — IR
 — HOT
 — DAYLIGHT
 — COLD
 — NEODIMIUM

