


# COMPASS DUO



**TOO LOW TOO SMALL**

## ANTARES

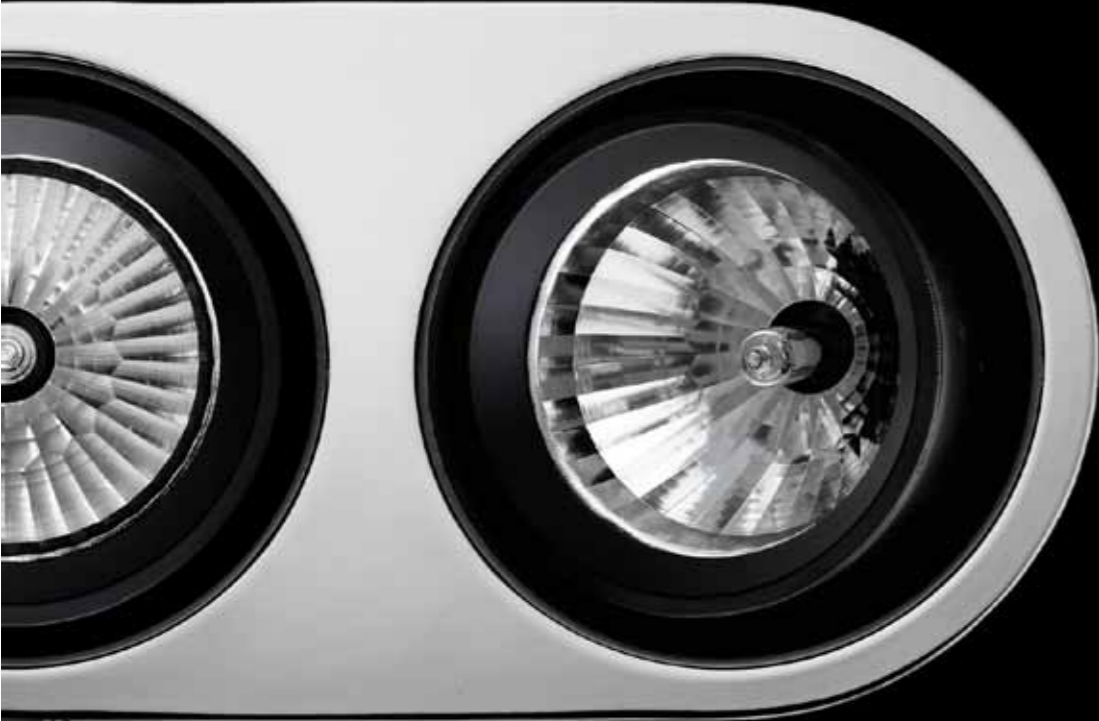

**AN03.3556**  
.30 WHITE .14 BLACK .02 SILVER  
.06 CHROME .07 GOLD .22 COPPER  
.21 BRUSHED NICKEL .BZ BRONZE

Recess mounted, requires remote transformer



**AN03.3563**  
.30 WHITE .14 BLACK .02 SILVER  
.06 CHROME .07 GOLD .22 COPPER  
.21 BRUSHED NICKEL .BZ BRONZE

Recess mounted, requires remote control gear

### Lamp and Reflector Options

**LOW VOLTAGE**  
GY6.35 QT-12 (max 2x100w)  
6°, 9°, 29°  
G53 QR-111 (max 2x100w)  
4°, 8°, 24°, 45°

**DISCHARGE**  
G8.5 CDM-TC (2x 35w/70w) 14°, 36°, 48°  
G12 CDM-T (2x35w/70w) 12°, 25°, 39°

### Adjustable twin recessed downlight

**Compass Duo Adjustable Downlight**  
TWIN HEAD RECESSED ADJUSTABLE LOW VOLTAGE DOWNLIGHT

**Compass Duo Adjustable Downlight**  
TWIN HEAD RECESSED ADJUSTABLE METAL HALIDE DOWNLIGHT

### Accessories


Anti-Glare Grid  
Elliptical Light Distribution Lens  
Flood Lens  
Screening Cylinder

### Filters

- BLUE SKY BLUE AMBER RED UV IR HOT DAYLIGHT COLD NEODIMIUM


**BODY REFLECTOR** Die cast aluminium alloy  
Super pure anodised aluminium with black screening ring  
**BEZEL** Die cast aluminium, plated or powder coated  
**FIXING** Stainless steel springs  
**ADJUSTMENT** Horizontal 356°, Vertical 40°  
**FRONT GLASS** 4mm tempered safety glass

### 2x Max100W QT-12 12V Low Voltage

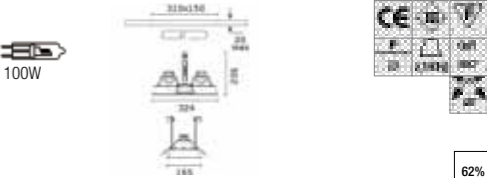

62%

### 2x Max 70W CDM-TC G8.5

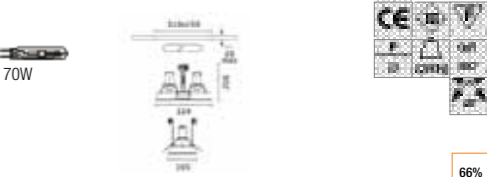

66%