


KAP



TOO LOW TOO SMALL

ANTARES

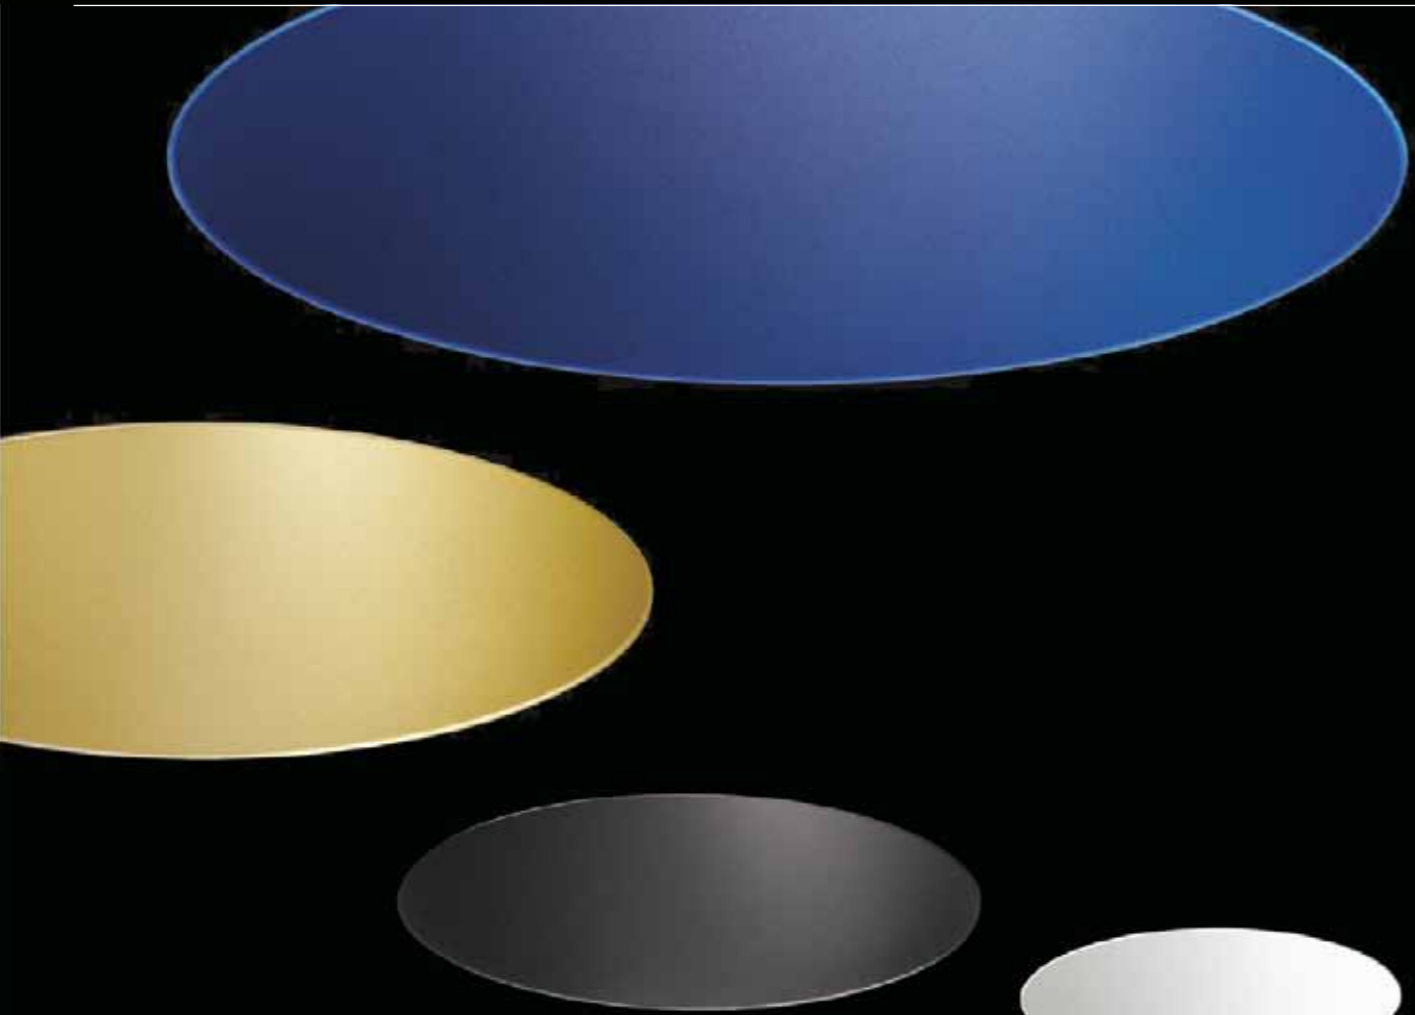

AN03.4400
 .B1 WHITE .BU BLUE
 .GL GOLD .74 BLACK

Pre-installation frame required,
 code number: AN08.8155.00



AN03.4401
 .B1 WHITE .BU BLUE
 .GL GOLD .74 BLACK

Pre-installation frame required,
 code number: AN08.8155.00



AN03.4410
 .B1 WHITE .BU BLUE
 .GL GOLD .74 BLACK

Pre-installation frame required,
 code number: AN08.8156.00

**Ceiling recessed,
 fixed trimless downlight with
 remote control gear.**

KAP Ø105 TH
 RECESSED DIRECT TRIMLESS DOWNLIGHT,
 WITH DECORATIVE COLOURED
 REFLECTOR OPTIC

Requires remote transformer

KAP Ø105 G8.5
 RECESSED DIRECT TRIMLESS DOWNLIGHT,
 WITH DECORATIVE COLOURED
 REFLECTOR OPTIC


Requires remote control gear

KAP Ø145 TH
 RECESSED DIRECT TRIMLESS DOWNLIGHT,
 WITH DECORATIVE COLOURED
 REFLECTOR OPTIC

Requires remote transformer


BODY Die cast aluminium
REFLECTOR Coloured or anodised aluminium
FIXING Requires pre-installation frame
GLASS Front 4mm tempered safety glass

1 x 50W QT-12 GY6.35




54%

1 x 35W CDM-TC G8.5



57%

1 x 75W QT-12 GY6.35



58%

KAP




AN03.4411
.B1 WHITE .BU BLUE
.GL GOLD .74 BLACK

Pre-installation frame required, code number: AN08.8156.00

KAP Ø145 G8.5
RECESSED DIRECT TRIMLESS DOWNLIGHT,
WITH DECORATIVE COLOURED
REFLECTOR OPTIC

Requires remote transformer

1 x 70W CDM-TC G8.5

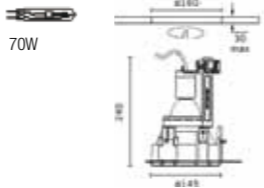

61%

Lamp and Reflector Options

LOW VOLTAGE
GY6.35 QT-12 (max 50w) Ø105mm 32°-34°
GY6.35 QT-12 (max 75w) Ø145mm 38°-41°

DISCHARGE
G8.5 CDM-TC (max 35w) Ø105mm 53°-56°
G8.5 CDM-TC (max 70w) Ø145mm 63°-70°

Accessories

Pre-installation kit Ø105

Pre-installation kit Ø145



TOO LOW TOO SMALL