

PURE SPOTLIGHT

KNUD HOLSCHER

Track or surface projector, in 3 body sizes. LV projectors have integral dimmer, and are dimmable by leading and trailing edge dimmers. Adjustable 180° rotation, 2x90° tilt, lockable.

BODY Aluminium alloy
REFLECTOR Super pure aluminium with specular finish
BEZEL Aluminium, and black thermoplastic
FIXING 3 circuit track, or surface plate
FRONT GLASS 4mm tempered safety glass.




AN09.1000
 .30 WHITE .14 BLACK
 .02 SILVER

3 circuit track mounted, integral electronic dimmable transformer

Pure Spot 1
 TRACK MOUNTED, LOW VOLTAGE PROJECTOR

Hidden connector, body clicks over track adapter.
 Lockable head

1x MAX 50W QR-CBC 12V Low voltage

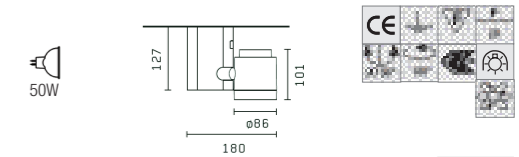

AS LAMP SELECTED




AN09.1100
 .30 WHITE .14 BLACK
 .02 SILVER

Surface mounted, integral electronic dimmable transformer

Pure Spot 1
 SURFACE MOUNTED, LOW VOLTAGE PROJECTOR

1x MAX 50W QR-CBC 12V Low Voltage

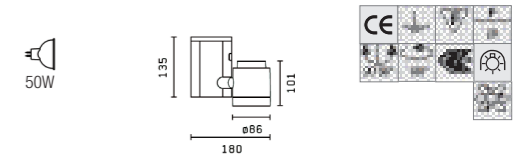

AS LAMP SELECTED




AN09.1010
 .30 WHITE .14 BLACK
 .02 SILVER

3 circuit track mounted, integral electronic gear

Pure Spot 1
 TRACK MOUNTED, METAL HALIDE SPOTLIGHT

Hidden connector, body clicks over track adapter.
 Lockable head

1X 35W CDM-TM

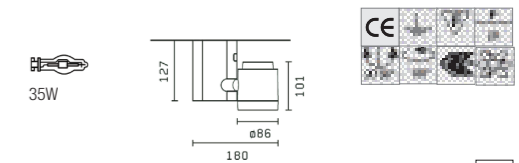

64%

PURE SPOTLIGHT



AN09.1110
.30 WHITE .14 BLACK
.02 SILVER


Surface mounted, integral electronic control gear

Pure Spot 1
SURFACE MOUNTED, METAL HALIDE PROJECTOR

1x 35W CDM-TM



35W



64%



AN09.1906
.30 WHITE .14 BLACK
.02 SILVER



3 Circuit track mounted, integral electronic control gear

Pure Spot 3
TRACK MOUNTED, METAL HALIDE PROJECTOR

1x 70W CDM-T G12



70W



65%



AN09.1021
.X0 WHITE .14 BLACK
.02 SILVER


3 Circuit track mounted, integral electronic control gear

Pure Spot 2
TRACK MOUNTED, METAL HALIDE PROJECTOR

1x 35W CDM-TC



35W



65%



AN09.1956
.30 WHITE .14 BLACK
.02 SILVER



Surface mounted, integral electronic control gear

Pure Spot 3
SURFACE MOUNTED, METAL HALIDE PROJECTOR

1x 70W CDM-T G12 Metal Halide



70W



65%



AN09.1121
.30 WHITE .14 BLACK
.02 SILVER


Surface mounted, integral electronic control gear

Pure Spot 2
SURFACE MOUNTED, METAL HALIDE PROJECTOR

1x 35W CDM-TC



35W



65%



AN09.1916
.30 WHITE .14 BLACK
.02 SILVER


3 circuit track mounted, integral electronic control gear

Pure Spot 3
TRACK MOUNTED, ADJUSTABLE METAL HALIDE REFLECTOR SPOTLIGHT

1x 70W CDMR-111



70W



AS LAMP SELECTED



PURE SPOTLIGHT



AN09.1966
 .30 WHITE .14 BLACK
 .02 SILVER

Surface mounted, integral electronic control gear

Pure Spot 3
 SURFACE MOUNTED, METAL HALIDE REFLECTOR PROJECTOR



AS LAMP SELECTED

Lamp and Reflector Options

PURE SPOT 1
 Low Voltage:
 GX5.3 QR-CBC 51 (max 50W)
 10°, 24°, 38°, 60°
 GY6.35 QT-12 (max 50W)
 10°, 22°, 57°
 Discharge:
 PGJ5 CDM-Tm (max 35W)
 8°, 24°, 54°

PURE SPOT 2
 Low Voltage:
 GY6.35 QT-12 (max 100W)
 6°, 10°, 21°
 Discharge:
 G8.5 CDM-TC (max 70W)
 15°, 42°, 66°

PURE SPOT 3
 Low Voltage:
 G53 QR-111 (max 100W)
 8°, 24°, 45°
 Discharge:
 G12 CDM-T (max 70W)
 13°, 35°, 44°
 GX8.5 CDMR-111 (max 70W)
 10°, 40°

Accessories

Honeycomb louvre
 Elliptical Light Distribution Lens
 Flood Lens
 Accessory holding ring

Filters

BLUE SKY BLUE AMBER RED UV IR HOT DAYLIGHT COLD NEODIMIUM

