

PURE WALL



KNUD HOLSCHER



AN09.1426
.30 WHITE .14 BLACK
.02 GREY

Surface wall projector,
integral control gear, flood reflector



AN09.1436
.30 WHITE .14 BLACK
.02 GREY

Surface projector,
integral control gear,
flood reflector



AN09.1541
.30 WHITE .14 BLACK
.02 GREY

Surface projector,
integral control gear, flood reflector

Modular adjustable wall spotlight, single or double optic

Adjustable 356° rotation, 60° tilt

Pure 1 Wall 1 Light

WALL MOUNTED ADJUSTABLE PROJECTOR

Pure 1 Wall 2 light


WALL MOUNTED ADJUSTABLE PROJECTOR

Pure 2 Wall 1 Light

WALL MOUNTED ADJUSTABLE PROJECTOR


BODY Die cast aluminium, and extruded aluminium modular structure
REFLECTOR Super pure aluminium with specular finish
BEZEL Aluminium
FIXING Fast fix steel bracket
FRONT GLASS 4mm tempered safety glass

1x20W CDM-Tm Ceramic Metal Halide

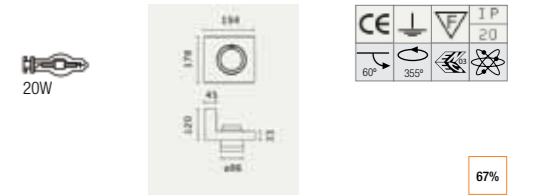


67%

2x20W CDM-Tm Ceramic Metal Halide

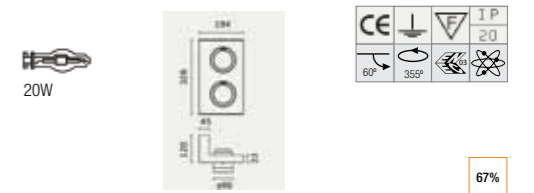

67%

1x35W CDM-TC Ceramic Metal Halide

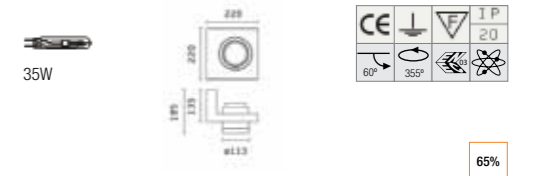

65%

PURE WALL




AN09.1511
 .30 WHITE .14 BLACK
 .02 GREY

Surface projector, integral control gear, flood reflector

Pure 2 Wall 2 Light
 WALL MOUNTED ADJUSTABLE PROJECTOR

2x35W CDM-TC Ceramic Metal Halide

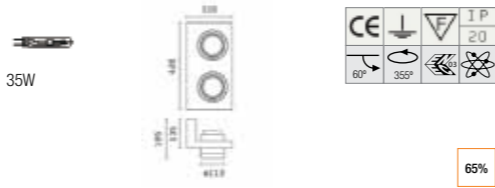

Lamp and Reflector Options

Pure Wall 1
 Low Voltage:
 GX5.3 QR-CBC 51 (max 50W) or (max 2x50W) 10°, 24°, 38°, 60°
 GY6.35 QT-12 (max 50W) or (max 2x50W)
 10°, 22°, 57°
 Discharge:
 PGJ5 CDM-Tm (max 35W) or (max 2x35W)
 8°, 24°, 54°
 GX10 HI-PAR 51 (max 35W) or (max 2x35W)

Pure Wall 2
 Low Voltage:
 GY6.35 QT-12 (max 100W) or (max 2x100W)
 6°, 10°, 29°
 Discharge:
 G8.5 CDM-TC (max 70W) or (max 2x70W)
 15°, 42°, 66°

Accessories

Elliptical Light Distribution Lens
 Flood Lens
 Black Screening Cylinder
 Accessory Holding Ring
 Honeycomb anti-glare screen

Filters

- BLUE
- SKY BLUE
- AMBER
- RED
- UV
- IR
- HOT
- COLD
- DAYLIGHT
- NEODIMIUM



TOO LOW TOO SMALL