

COMPASS DOWNLIGHT



ANTARES



AN03.3507
.30 WHITE .14 BLACK .02 SILVER

Recess mounted, requires remote transformer



AN03.3508
.30 WHITE .14 BLACK .02 SILVER

Recess mounted, requires remote transformer



AN03.3512
.30 WHITE .14 BLACK .02 SILVER

Recess mounted, requires remote control gear

Fixed or Adjustable recessed downlight.
Adjustable 355° rotation, 40° tilt


Compass Adjustable Ø90 Downlight
RECESSED LOW VOLTAGE DOWNLIGHT WITH PINHOLE BEZEL

Compass Adjustable Ø90mm Downlight
RECESSED LOW VOLTAGE DOWNLIGHT WITH SLOT BEZEL


Compass Fixed Ø135mm Downlight
RECESSED METAL HALIDE DOWNLIGHT

BODY REFLECTOR Pressed steel & die cast aluminium alloy
BEZEL Super pure anodised aluminium with black screening ring
Die cast aluminium (fixed), thermoplastic (adjustable)
FIXING FRONT GLASS Stainless steel fixing brackets
4mm tempered safety glass


1x Max 50W QR-CBC 51

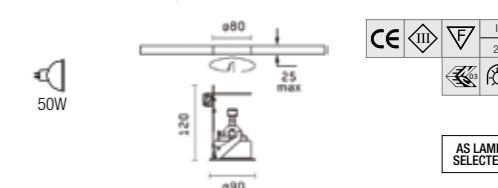

1x Max 50W QR-CBC 51

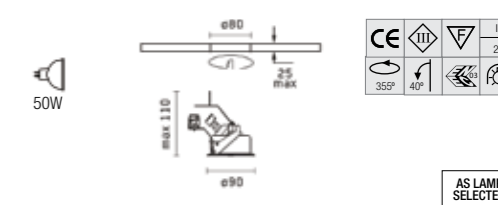

1x Max 70W CDM-TC G8.5

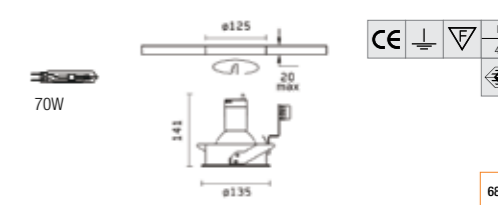

COMPASS DOWNLIGHT




AN03.3520
.30 WHITE .14 BLACK .02 SILVER

Recess mounted, requires remote transformer

Compass Adjustable Ø162 Downlight
RECESSED ADJUSTABLE LOW VOLTAGE DOWNLIGHT

1x Max 100W QR-11112V Low Voltage Reflector

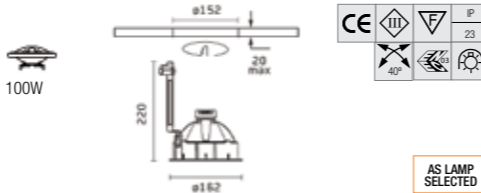

Lamp and reflector options

LOW VOLTAGE
GX5.3 QR-CBC 51 (max 50w)
10°, 24°, 38°, 60°
G53 QR-111 (MAX 100W)
8°, 24°, 45°
GY6.35 QT-12 (MAX 100W)
6°, 9°, 29°, 34°, 41°, 49°, 53°, 64°, dedicated wall-wash reflector

DISCHARGE
G12 CDM-T (35w/70w/150w)
12°, 25°, 39°
G8.5 CDM-TC (35W/70W)
14°, 36°, 45°, 48°, 52°, dedicated wall-wash optic
GX12 White Son (100w)
19°, 26°

Accessories

Black Screening Cylinder
Elliptical Light Distribution Lens
Flood Lens
Anti Glare Grid




AN03.3525
.30 WHITE .14 BLACK .02 SILVER

Recess mounted, requires remote control gear

Compass Adjustable Ø162 Downlight
RECESSED ADJUSTABLE METAL HALIDE DOWNLIGHT

Osram powerball lamp will not fit this luminaire

1x Max 150W CDM-T G12

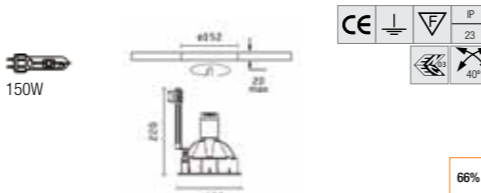

Filters

- BLUE
- SKY BLUE
- AMBER
- RED
- UV
- IR
- HOT
- COLD
- DAYLIGHT
- NEODIMIUM



AN03.3529
.30 WHITE .14 BLACK .02 SILVER

Recess mounted, requires remote control gear

Compass Adjustable Ø162 Downlight
RECESSED ADJUSTABLE METAL HALIDE DOWNLIGHT

1x Max 70W CDM-TC G8.5

